



sustainable



carbon neutral

DISCHARGES FOR BIOMASS-FIRING SYSTEMS


Sustainable through permanent use

Pushing Floor Discharge SBA

extremely stable discharge device for biomass-firing systems

Fuel

- + Wood Chips
- + Wood Shavings
- + Pellets
- + Briquettes

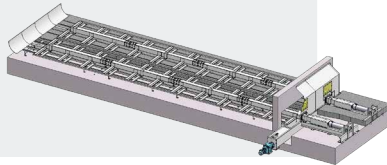

Advantages


- ✓ designed for highest continuous load
- ✓ suitable for any fuel size
- ✓ hydraulic drive with power distribution in the concrete floor
- ✓ drive-on version

Discharge NOF

for automatic biomass-firing systems in the lower and middle performance range

Fuel

- + Wood Chips
- + Wood Shavings
- + Briquettes

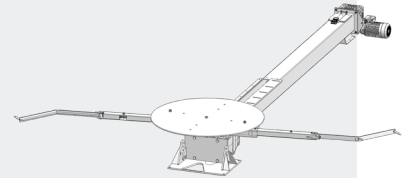

Advantages


- ✓ extremely reliable, low-maintenance operation
- ✓ no double-floor necessary
- ✓ robust design
- ✓ suitable for direct connection to the firing system

Helical Auger Discharge S 151

for automatic biomass-firing systems in the medium performance range

Fuel

- + Chips from the wood working
- + Wood Chips up to P16S
- + also for Briquettes
- + Particularly suitable for Wood-based materials



Advantages


- ✓ low maintenance operation
- ✓ robust construction for continuous operation
- ✓ suitable for round silos as well as for silos with a square or rectangular base
- ✓ special versions with two discharges chutes for silo emptying or multi-firing systems

Horizontal Auger Discharge S 250

for automatic biomass-firing systems in the larger power range

Fuel

- + Chips from the wood working
- + Wood Chips up to P16S
- + also for Briquettes and Wood-based materials



Advantages

- ✓ extremely durable
- ✓ highly reliable
- ✓ almost complete emptying of the silo by horizontal discharge
- ✓ robust construction for a permanent use in silos



sustainable. innovative. reliable.